

WPSPro 3.0: Upgrading to Version 3.0

Contents

- Introduction3
- Section 1: Download the WPS Pro 2.x to 3.0 Updater Files3
- Section 2: Prepare USB Drive for Installation.....3
- Section 3: Updating Your Console6
- Contact Us15

Introduction

Follow these instructions to upgrade your WPS from version 2 to version 3 software.

NOTE:

This is for DNP IAM customers only.

Section 1: Download the WPS Pro 2.x to 3.0 Updater Files

User instructions here for accessing the files via the website.

1. From your browser, navigate to the following URL:


<http://dnpphoto.com/en-us/Support/Legacy-Equipment/Legacy-Drivers-and-Tools>

2. Under the Legacy Wireless Print Server section, download the update file. This file downloads as a zip file.
3. Make note of where the file downloads to on your PC.



Section 2: Prepare USB Drive for Installation

The **USB Drive** must have at minimum of **4GB** space.


1. Insert **USB** into your PC and **Format** the drive by right clicking on **USB Drive**.

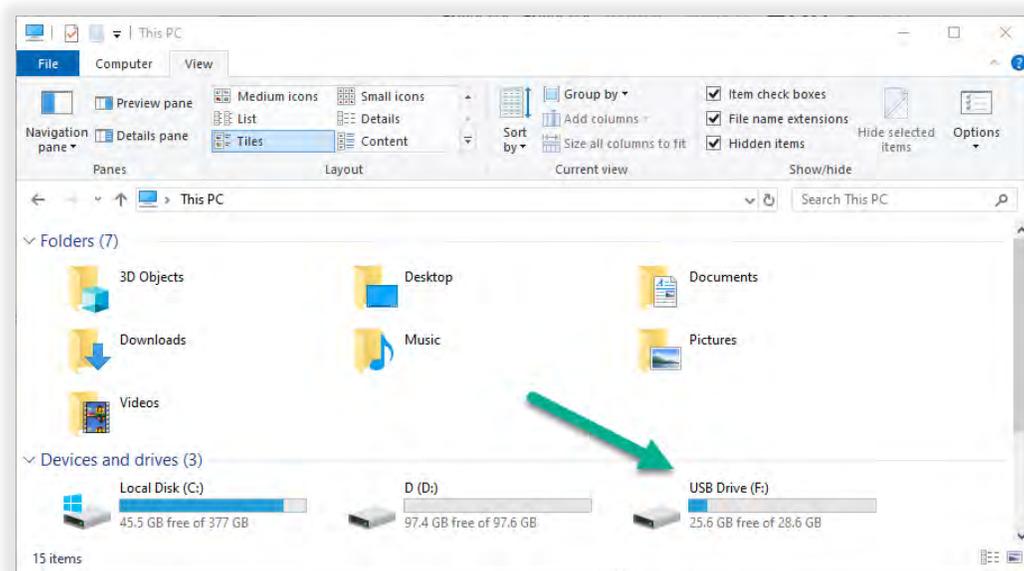


2. Select **Format** and then click on the **Start** button.

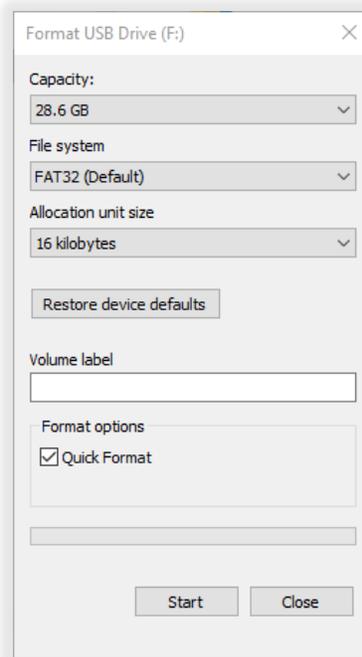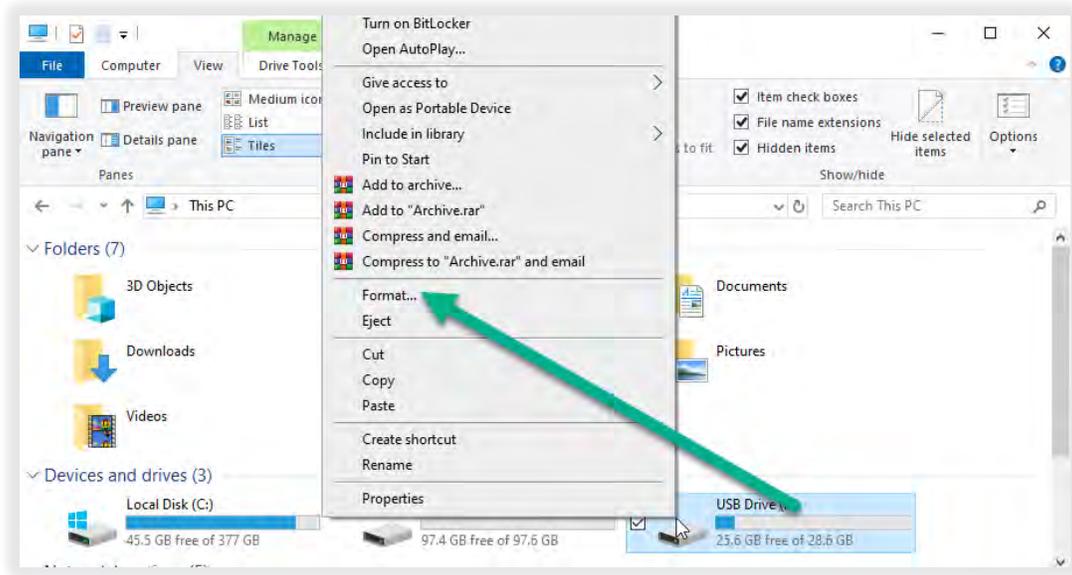

3. Locate the zipped files you downloaded and extract the WPS Pro software.

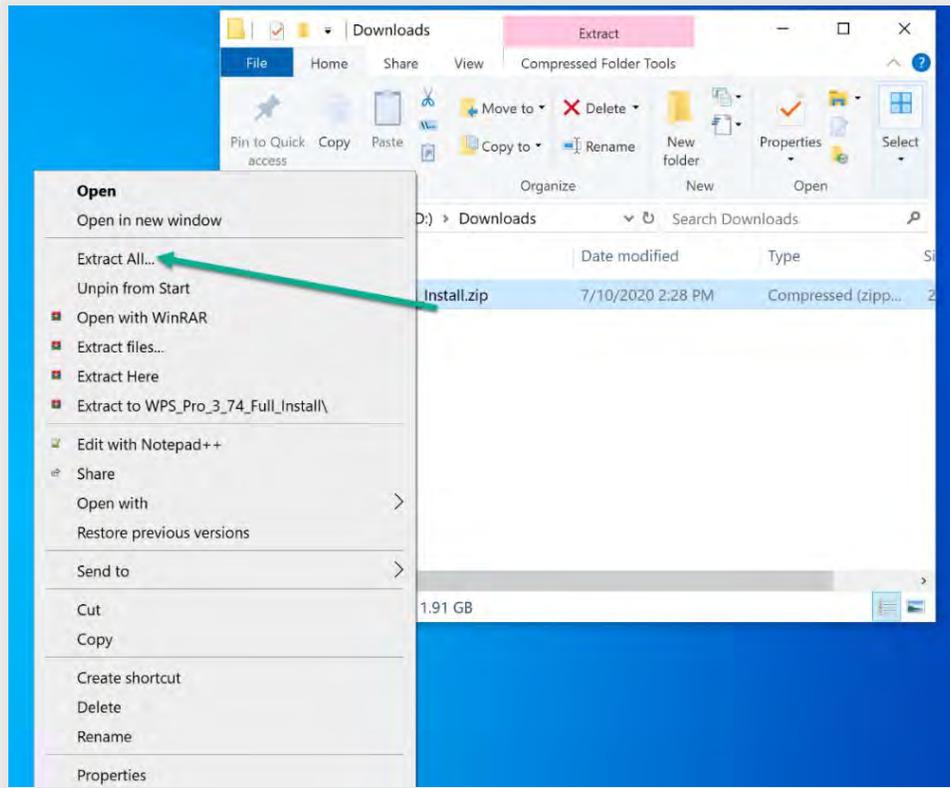


4. Copy the extracted files to your **USB drive**:

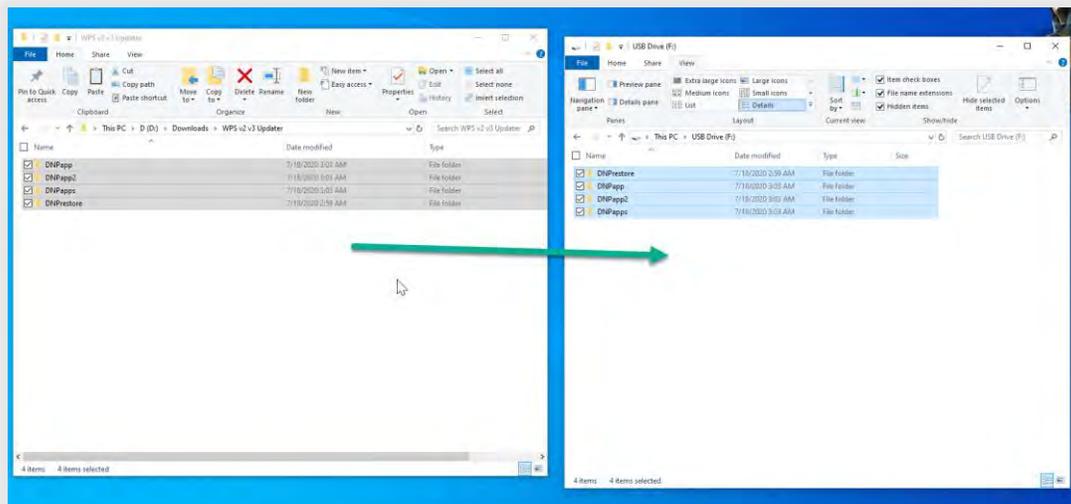


Section 3: Updating Your Console

There are several steps to this update. Each step must be performed **and performed in the correct order**, as detailed below.


1. Insert the USB Drive into USB slot 4.

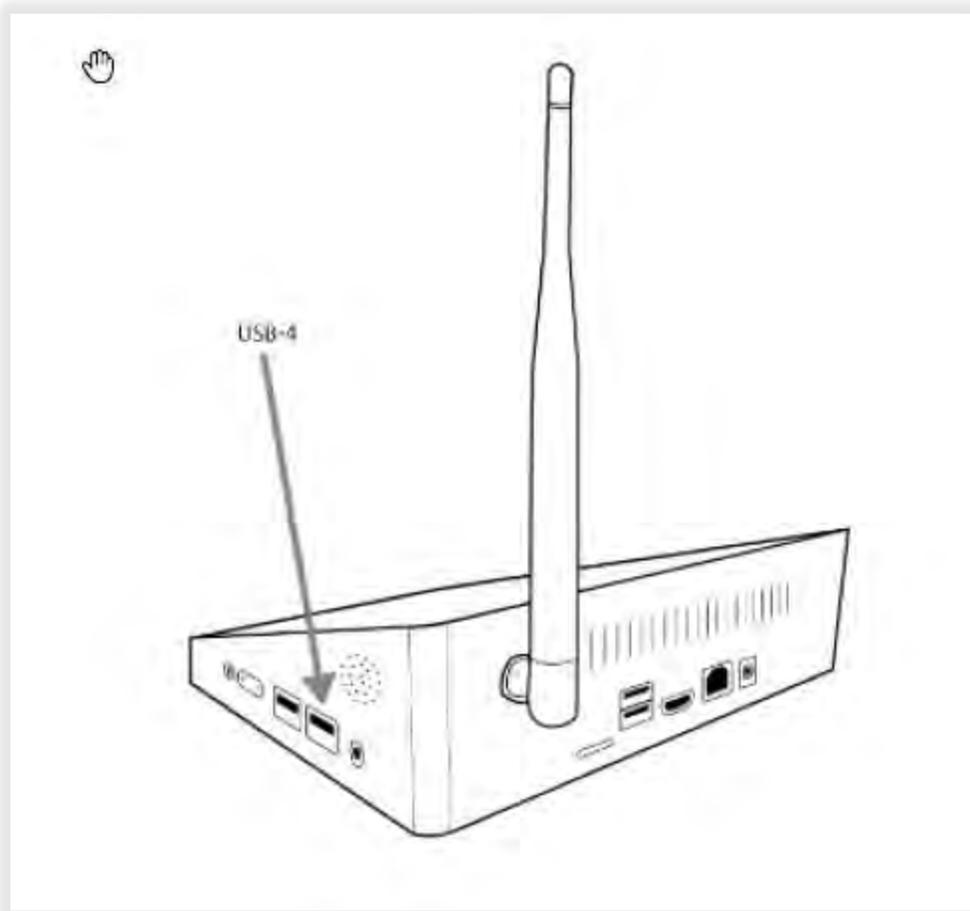

- 2. Enter **Maintenance** mode via hidden menu.
 - a. Tap the **HOME** icon.

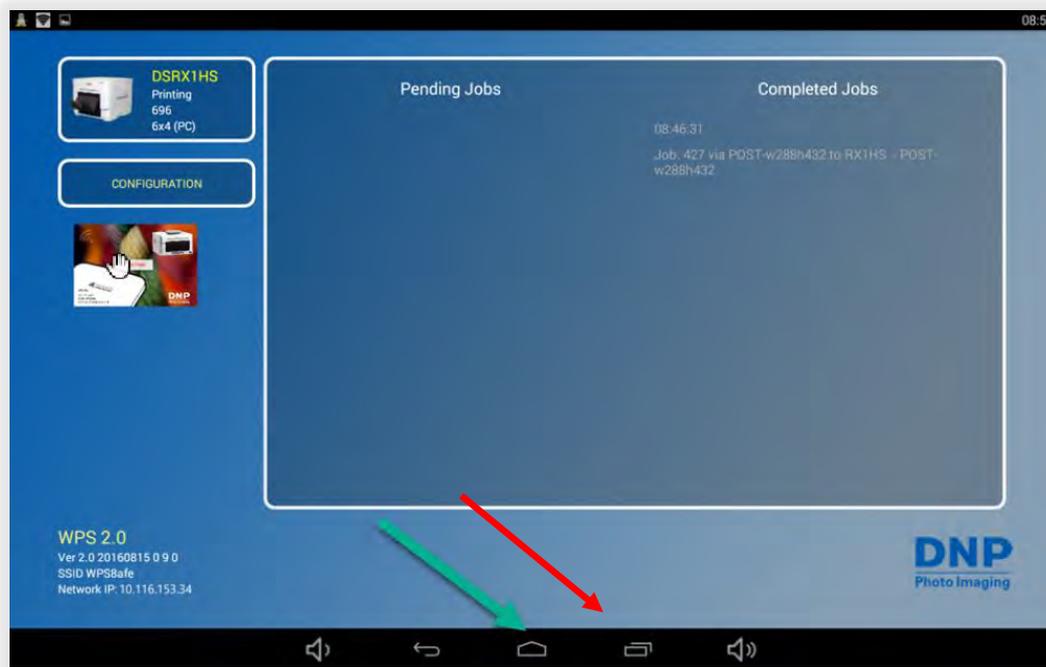


- b. Tap the upper right corner of the screen to go to the **Hidden Menu**.

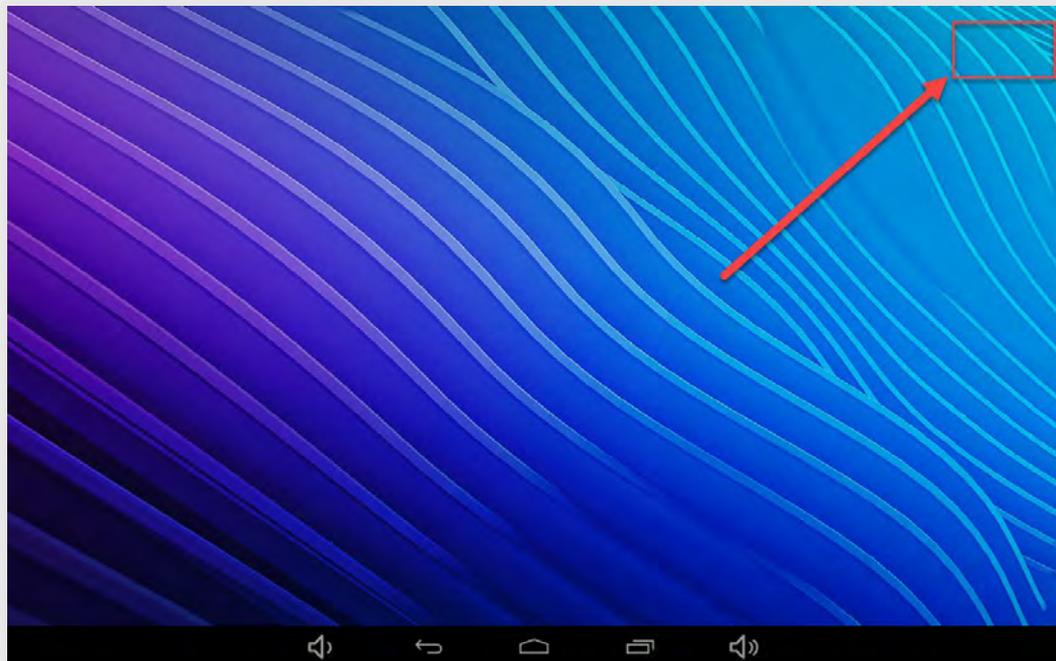


c. Tap **WPS Maintenance**.



d. Tap **Enter Maintenance Mode**.

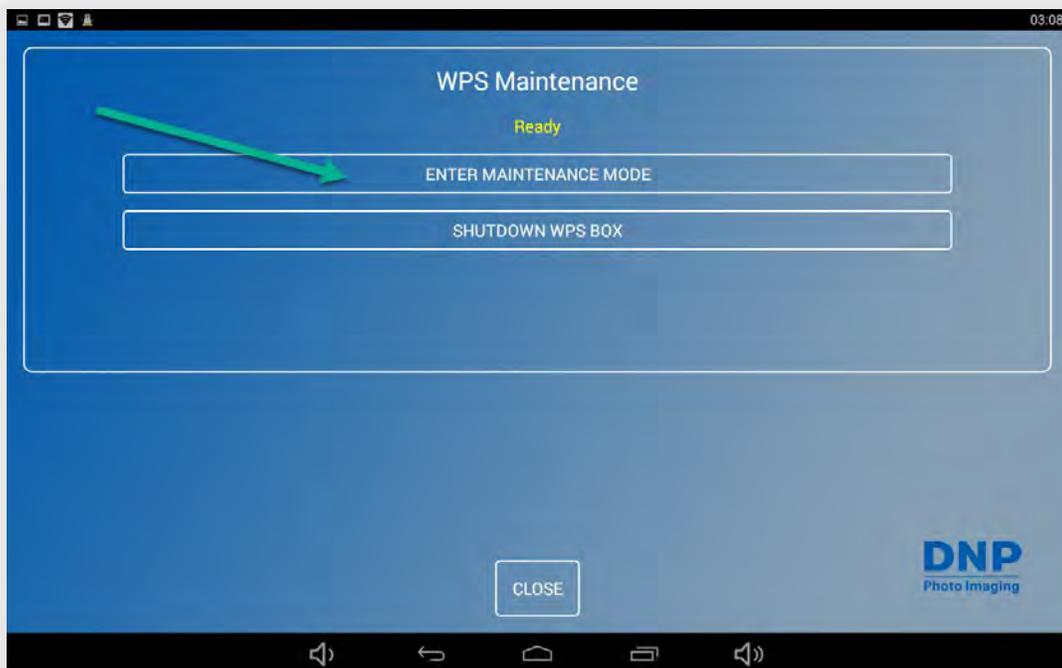


- e. Type **1234** and tap **OK**.

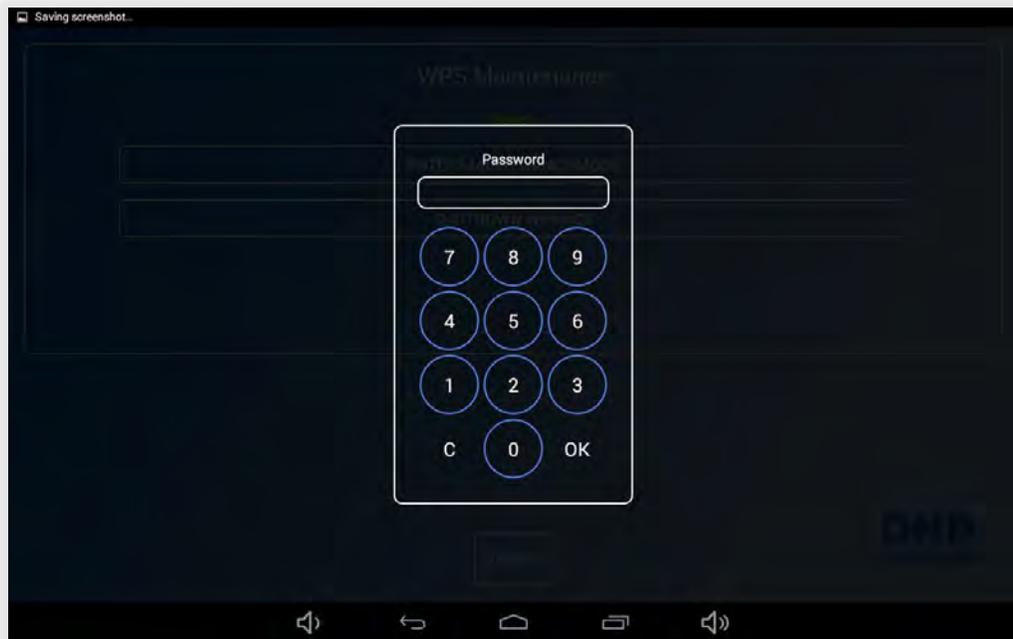

3. Begin the file copy process:

- a. Tap **Restore WPS** (it may take up to 10 seconds for the options to show.)

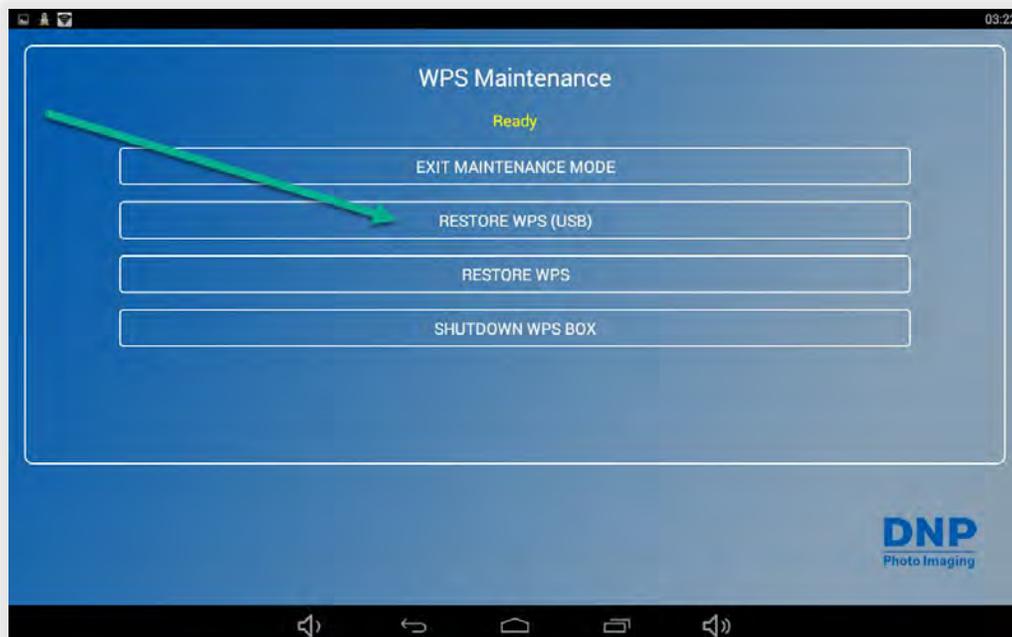


- b. Wait for the file to copy. (This process takes approximately 5-6 minutes.)




- c. After linux.img is completed, you will return to the maintenance screen.




4. Reboot the WPS by holding down the power button. **Keep the USB Drive Inserted.**

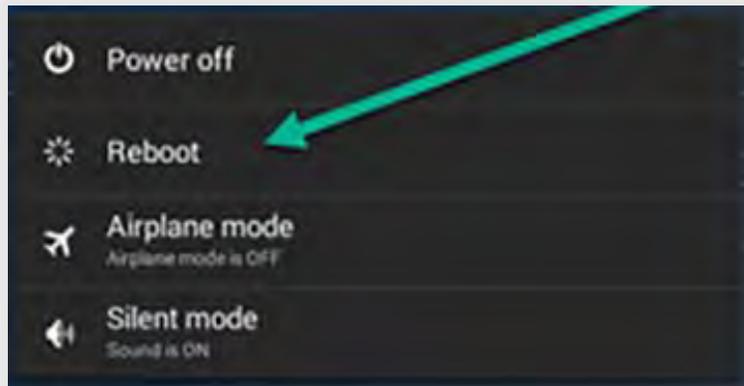


5. After reboot. tap **Install** on the **WPS Pro Updater** Screen.

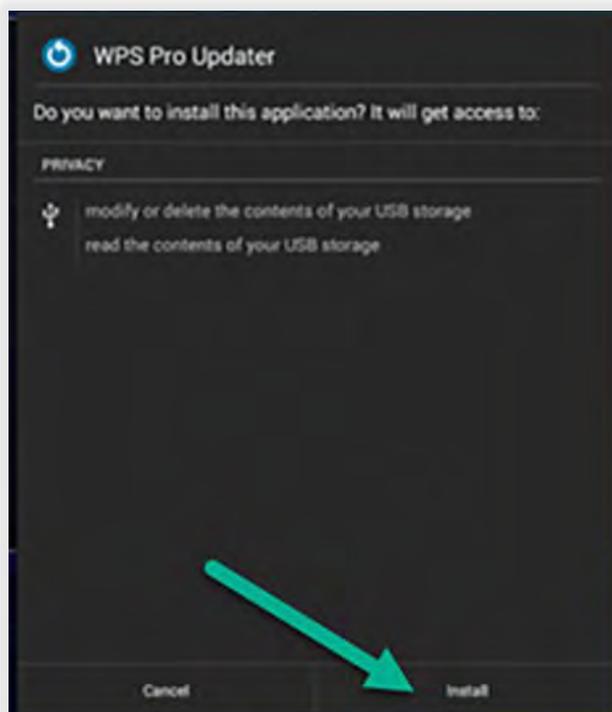


6. Wait for WPS to launch.

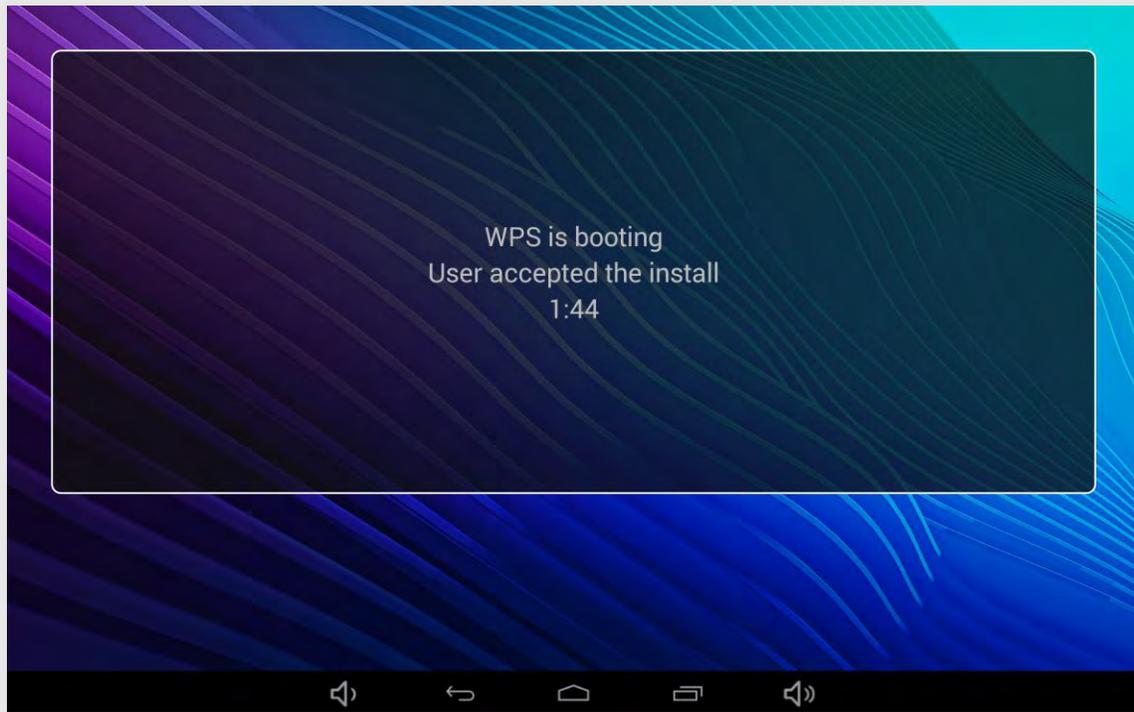

7. Finalize the WPS 3 software install.
 - a. Tap the **Home** button.

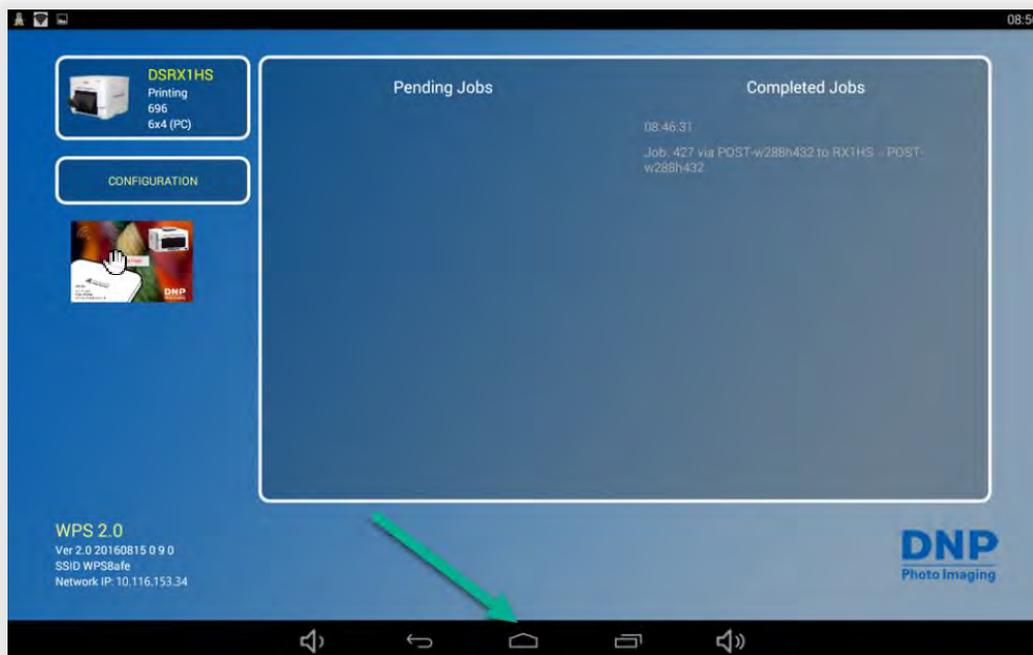


- b. Tap the upper right corner of the screen to go to the **Hidden Menu**.

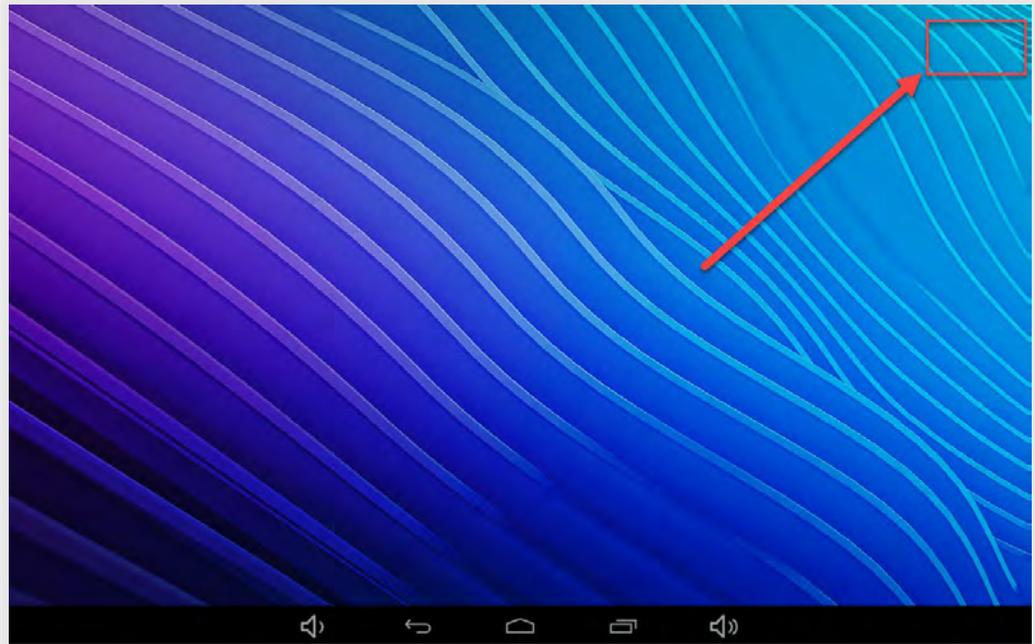


- c. Tap **WPS Pro Updater** (the console will restart.)




8. Tap **DNP WPS Pro Launcher** and then tap **ALWAYS**.

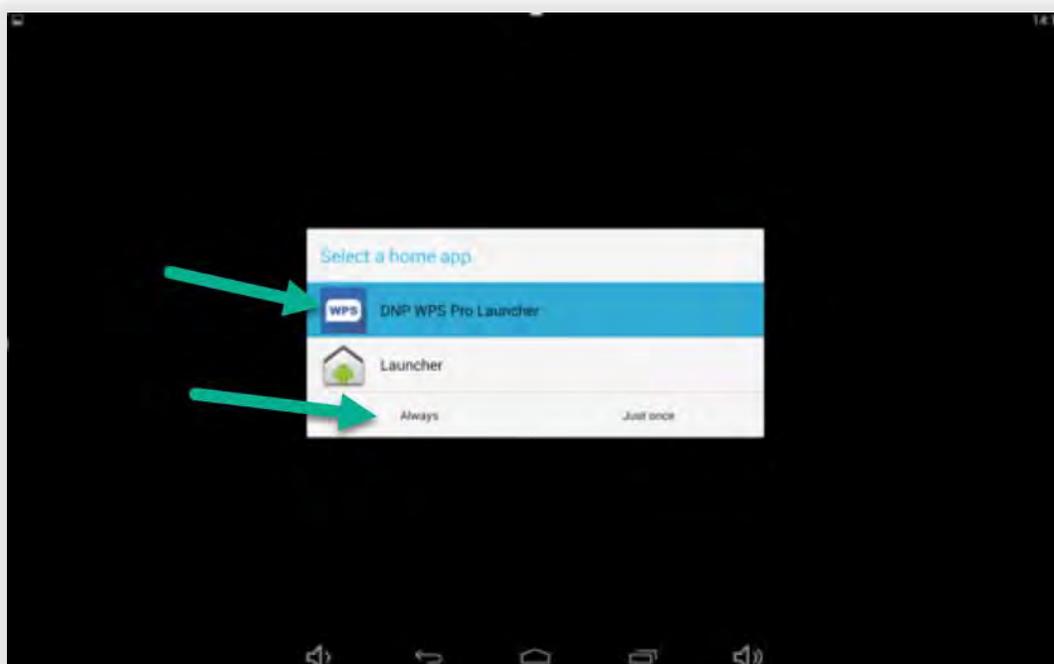

9. If you see this screen, tap **GRANT**. Otherwise, ignore this step.

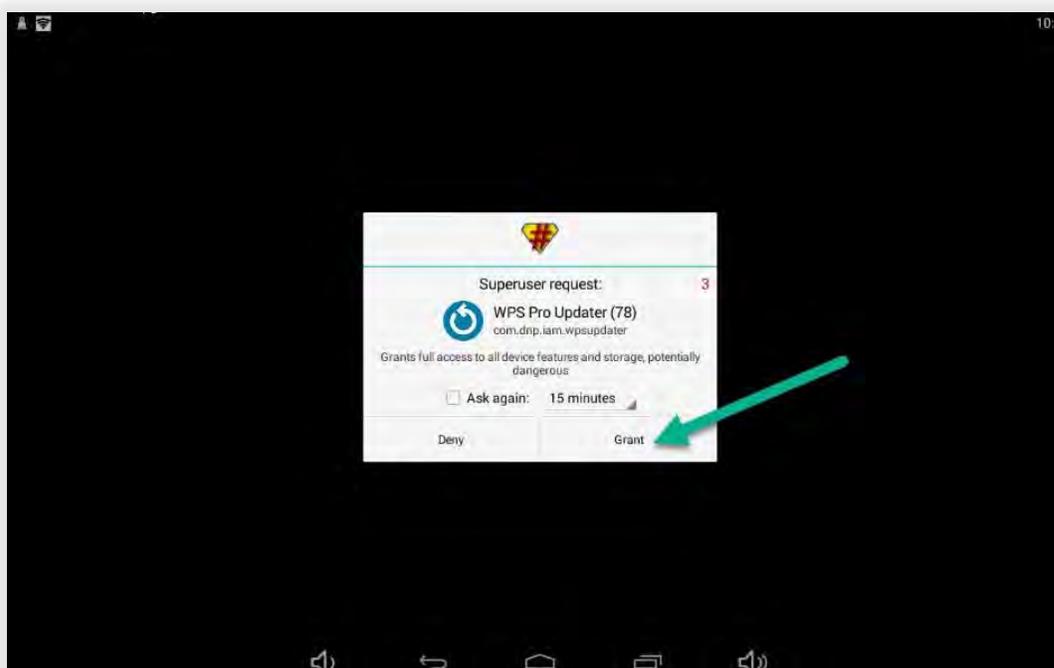

10. **Update Complete.** The WPS Pro is now updated to the WPS Pro version 3 software.

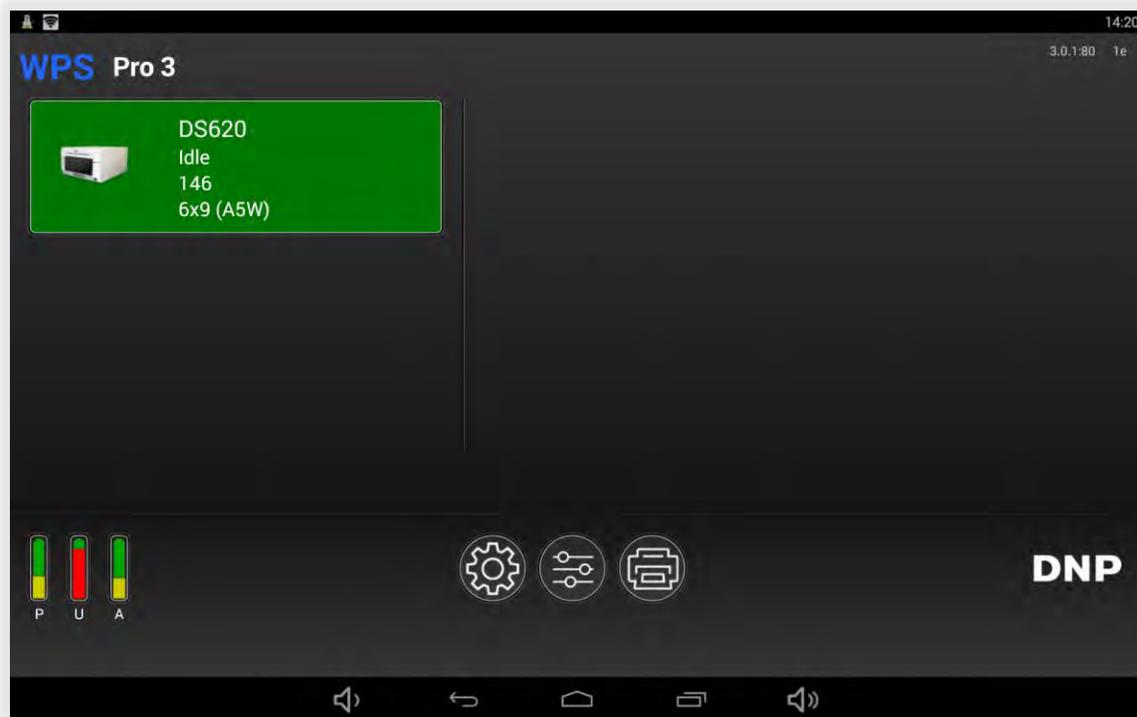

Contact Us

Need help? Contact DNP Imagingcomm America Corporation technical support at:

United States Phone: 855-367-7604

Email: dnpsupport@dnp.imgcomm.com

Website: www.dnpphoto.com

For hours of operation, see our website.